

# A CHAINSAW THAT GETS THE JOB DONE

CHAINSAW SCS-46 JET



TECHNICAL SPECIFICATIONS		SCS-46 JET
Displacement	45.0 cm <sup>3</sup>	
Power	1.8 kW	
Operate speed	3400 rpm	
Idling speed	2700-3400 rpm	
Tank capacity	0.5 L	
Oil capacity	0.24 L	
Fuel/oil ratio	40:1	
Chain pitch	9.25 mm	
Chain gauge	1.27 mm	
Cutting length	41 cm	
Carburetor	WALBRO	
Art.-No.	604.800.020	



CHAINSAW SCS-52 JET




TECHNICAL SPECIFICATIONS		SCS-52 JET
Displacement	51.5 cm <sup>3</sup>	
Power	2.1 kW	
Operate speed	34400 rpm	
Idling speed	2700-3400 rpm	
Engine	2 stroke / air cooling	
Tank capacity	0.5 L	
Oil capacity	0.24 L	
Fuel/oil ratio	40:1	
Chain pitch	9.25 mm	
Chain gauge	1.47 mm	
Cutting length	46 cm	
Carburetor	WALBRO	
Art.-No.	604.100.010	



## THE OVERVIEW

### CHAINSAW

NEW


JETForce<sup>®</sup>

Revised and refined fuel combustion, lower fuel consumption and reduced exhaust emission levels in accordance with the world's most stringent environmental regulations.



ASC System


Provides optimal engine performance with the automatic engine setting. No need to spend time on carburetor adjustments.

AIR Flow<sup>®</sup>

Reduced wear and longer operating time between filter cleanings because of the centrifugal air cleaning process.

ANTI Vib<sup>®</sup>

An innovative and proven engine suspension, which absorbs vibration to give maximum protection to the user's arms and hands.

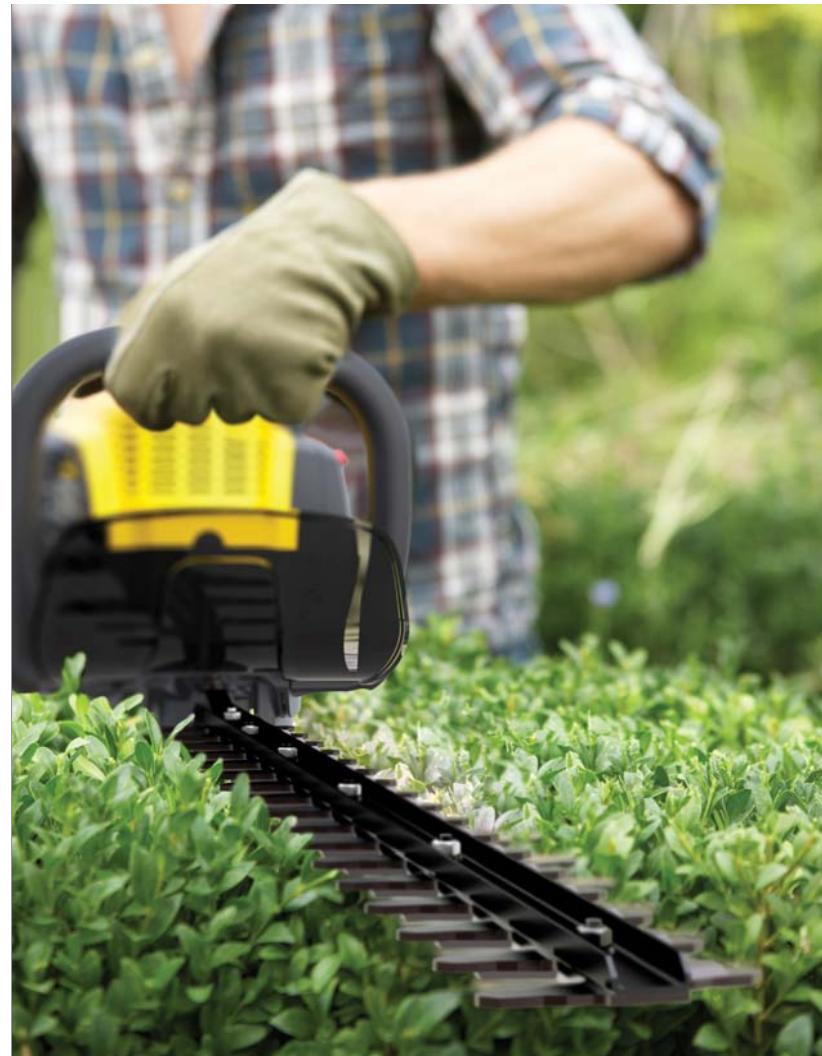

## HEDGE TRIMMER

The anti-vibration system and integrated hand protection ensure maximum safety during work

Even in cold conditions, 2 to 3 pulls on the starter provide a fast and easy start

Modern and appealing family design

Ergonomic swivel handle

Slim and slender body makes the Hedge Trimmer easy and convenient to handle in any situation



### PETROL HEDGE TRIMMER SHT- 26-55



TECHNICAL SPECIFICATIONS		SHT-26-55
Displacement	26 cc	
Power	750 W	
Max. engine speed	10000 rpm	
Idling speed	2700-3400 rpm	
Engine	2 stroke / air cooling	
Tank capacity	0,46 L	
Fuel	40:1	
Blade speed	3000 rpm	
Blade length	70 cm	
Cutting length	55 cm	
Max. cutting capacity	27 mm	
Blade	WALBRO	
Art.-No.		



# THE FUTURE IS NOW

Every Stanley Tool is created to help you work better, smarter, faster. This time, we have developed a new engine line, which delivers more power with much less fuel consumption and a much cleaner combustion. Due to the new and patented stratified scavenging engine on the new Stanley range, you are working with far less wear and tear because of optimized efficiency and it is much cheaper due to lower fuel consumption. You also work eco-friendly due to reduced emissions.

## PETROL LAWN TRIMMER STR-750



TECHNICAL SPECIFICATIONS		STR-750
Displacement	26 cc	
Power	750 W	
Operate speed	9000 rpm	
Idle speed	10 500 rpm	
Engine	2 stroke / air cooling	
Tank capacity	0.46 L	
Fuel/oil ratio	40:1	
Cutting line	3 m / 2 mm	
Art. No.		



## PETROL MULTI GARDEN TOOL STR-4IN1



TECHNICAL SPECIFICATIONS		STR-4IN1
Displacement	26 cc	
Power	750 W	
Operate speed	9000 rpm	
Idle speed	10 500 rpm	
Engine	2 stroke / air cooling	
Tank capacity	0.46 L	
Fuel/oil ratio	40:1	
Cutting line	213 m nylon	
Art. No.		




## THE OVERVIEW

### THE ENGINE OF STR-750 & STR-4IN1

NEW



### THE COMPOSITION OF STR-4IN1

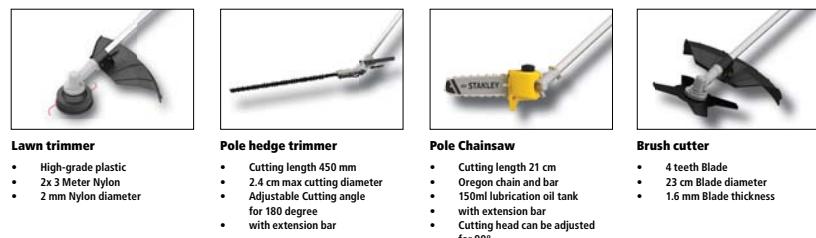



### BRUSH CUTTER

**NEW**

The anti-vibration system and integrated hand protection ensure maximum safety during work

Even in cold conditions, 2 to 3 pulls on the starter provide a fast and easy start.

Ergonomic handle with cockpit operation allows for comfortable handling

Modern and appealing family design

Strong shoulder belt with soft pad

The shaft is dividable in the middle and therefore very light and easy to transport and store

JETForce<sup>3</sup> Engine which gives you more power with less fuel consumption and reduced emissions

Rotary handle holder Easy for storage

**EURO II STANDARD**   **DIGITAL IGNITION**   **SMOOTH RUNNING**   **40:1 2 STROKE ENGINE**   **EASY START**

### BRUSH CUTTER SPS-1400



TECHNICAL SPECIFICATIONS	SPS-1400
Displacement	51.2 cc
Power	1400 W
Idling speed	3700-4200 rpm
Engine	2 stroke / air cooling
Fuel/oil ratio	40:1
Max. cutting speed/brush cutter	10500 rpm
Cutting diameter/brush cutter	255 mm
Blade specifications	255 x 25.4 x 1.4 mm
Max. cutting speed Lawn trimmer	9000 rpm
Cutting diameter Lawn trimmer	430 mm
Cutting line	265m, 2.4mm
Diameter	28 mm
Art.-No.	





**LEAF BLOWER & VACUUM WITH SHREDDER FUNCTION**

**NEW**

Strong single quick-release belt

Multifunctional handle with cockpit operation, comfortable and ergonomic

Modern and appealing family design

The conversion between the Blower function and Vacuum is quick and easy

Innovative recoil-starter which allows a very easy start

JETForce<sup>3</sup> Engine which gives you more power with less consuming of fuel and reduced emissions

**EURO II STANDARD**   **HIGH TECH ENGINE PATENTED**   **SMOOTH RUNNING**   **40:1 2 STROKE ENGINE**   **EASY START**

**PETROL LEAF BLOWER & VACUUM SLB- 3IN1**



TECHNICAL SPECIFICATIONS		SLB- 3in1
Displacement	26 cc	
Power	750 W	
Max. engine speed	8000 rpm	
Engine	2 stroke / air cooling	
Air volume	10 m <sup>3</sup> /min	
Air velocity	70 m/s	
Oil tank	0.4 L	
Fuel/oil ratio	40:1	
Dust bag	40 L	
Three functions	blower, vacuum & shredder	
Art.-No.		

<b>WATT</b> <b>750</b> PEAK POWER	<b>26 CC</b> DISPLACEMENT	<b>MULTI 3IN1</b> blower,vacuum & shredder
---	------------------------------	---

# PROFESSIONAL CUSTOMER NEEDS

## PROFESSIONAL TILLERS WITH NUMEROUS ACCESSORIES



## PETROL TILLER SGT-40-380

- Transported wheels
- Adjustable working depth
- 4x4 knives



TECHNICAL SPECIFICATIONS		SGT-40-380
Displacement	141 cc	
Power	2.940 W	
Operate speed	3600 rpm	
Engine	4 stroke / air cooling	
Engine Power	4 hp	
Fuel Tank capacity	0.75 L	
Oil Tank capacity	0.5 L	
Tilling Width	380 mm	
Tilling Depth	250 mm	
Tine speed forward	120 rpm	
Tine speed reverse	—	
Art.-No.		



## PETROL TILLER SGT-50-500

- Transported wheels
- Adjustable working depth
- 4x4 knives



TECHNICAL SPECIFICATIONS		SGT-50-500
Displacement	159 cc	
Power	3.000 W	
Operate speed	3600 rpm	
Engine	4 stroke / air cooling	
Engine Power	5 hp	
Fuel Tank capacity	1 L	
Oil Tank capacity	0.5 L	
Tilling Width	500 mm	
Tilling Depth	250 mm	
Tine speed forward	120 rpm	
Tine speed reverse	—	
Art.-No.		



## PETROL TILLER SGT-65-852

- Transported wheels
- Adjustable working depth
- 4x6 knives



TECHNICAL SPECIFICATIONS		SGT-65-852
Displacement	196 cc	
Power	4.100 W	
Operate speed	3600 rpm	
Engine	4 stroke / air cooling	
Engine Power	6.5 hp	
Fuel Tank capacity	3 L	
Oil Tank capacity	0.6 L	
Tilling Width	372 / 612 / 852 mm	
Tilling Depth	300 mm	
Tine speed forward	115 rpm	
Tine speed reverse	51 rpm	
Art.-No.		

